


AMP CONDENSING BOILERS - SUBMITTAL DATA SHEET



PO BOX 3244 | LANCASTER, PA 17601

AMP-2500

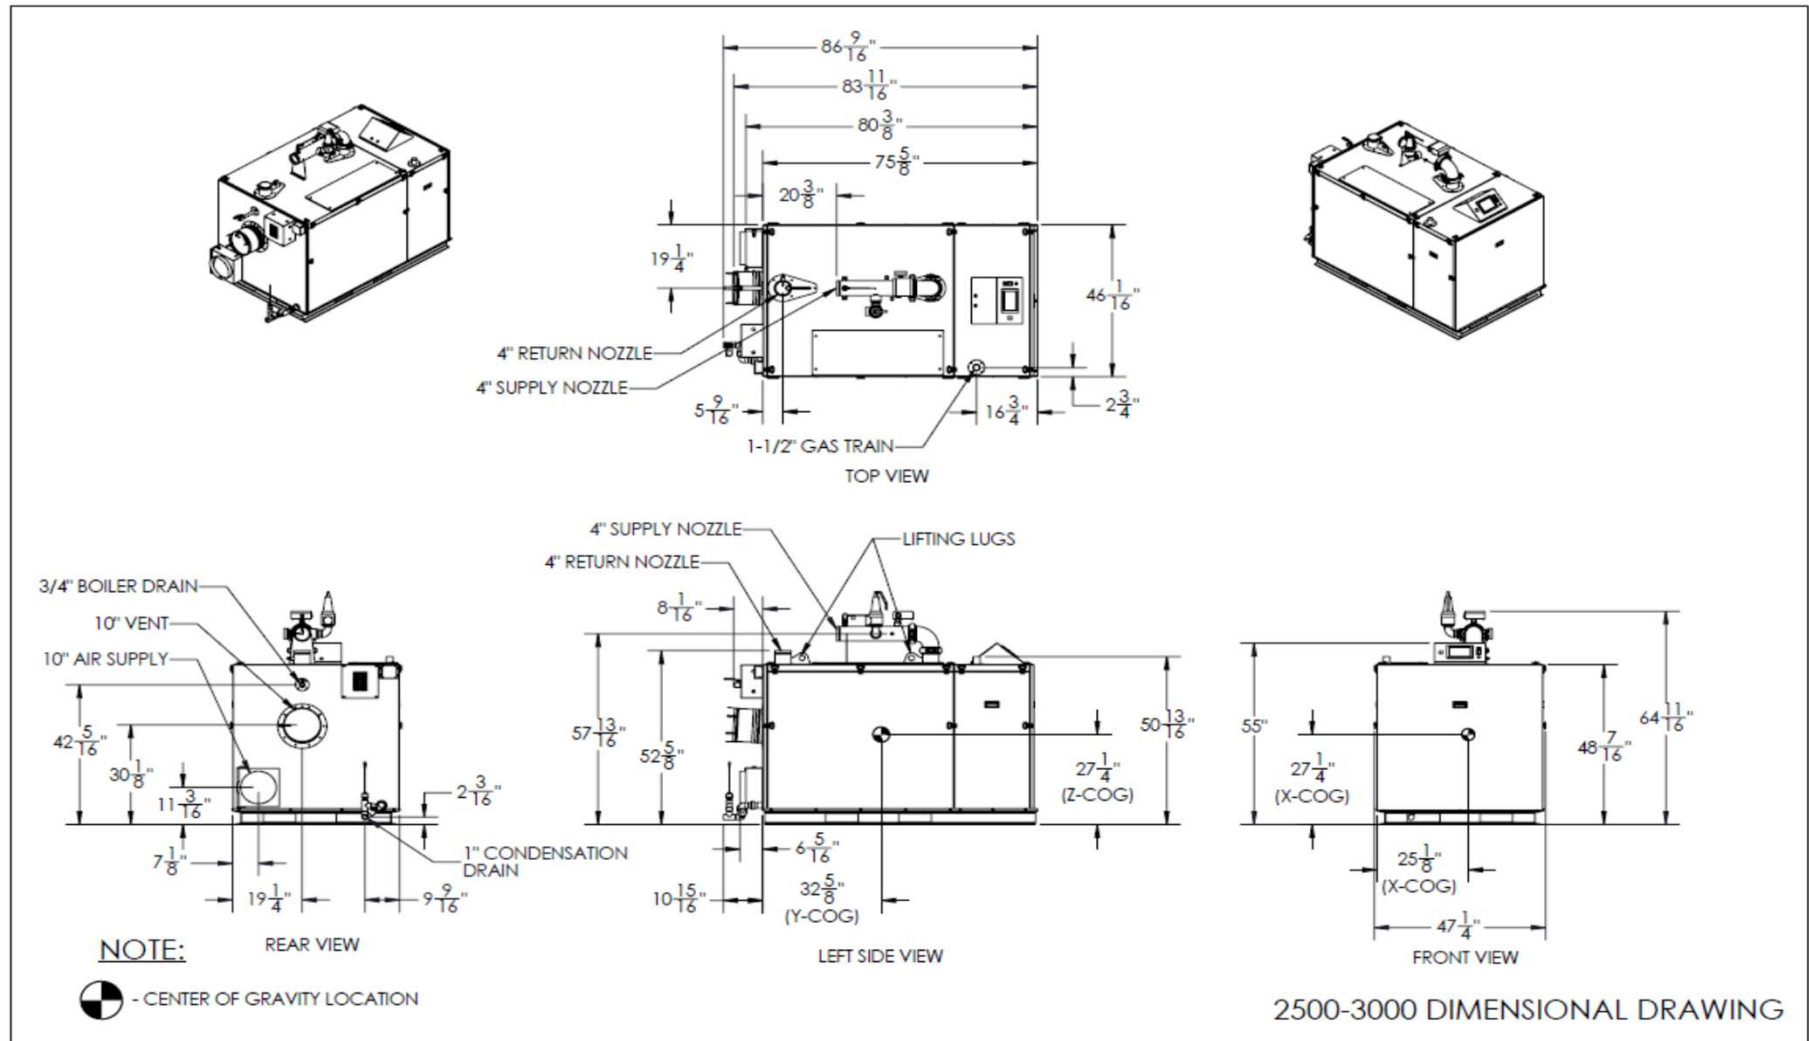

INNOVATIVE EQUIPMENT FOR
HOT WATER SYSTEMS

WWW.THERMALSOLUTIONS.COM

Updated 8/7/2024

AMP2500-20240801

AMP CONDENSING BOILERS - SUBMITTAL DATA SHEET

RATINGS AND CAPACITIES		
Input - Low fire:	500,000	BTU/HR
Input - High Fire:	2,500,000	BTU/HR
Output - High Fire:	2,425,000	BTU/HR
Boiler Horsepower:	72.4	BHP
Thermal Efficiency:	97.0%	
Low Fire Thermal Efficiency:	Up to 99%	
Heating Surface:	301	Sq.Ft.
Water Content:	34.6	Gallons
Fuel:	Natural Gas or LP Gas	
Firing Rate:	Full Modulation	
Burner Turndown:	5:1	
Low NOx Emissions:	< 10 ppm	
Inlet Gas Pressure (NG):	4" wc	Min.
Inlet Gas Pressure (LP):	8" wc	Min.
	14" wc	Max.
Shipping Weight, Approximate:	2,038	lbs
ASME Section IV (Max 160 PSIG / 210°F) Setpoint range is 60-185°F Adjustable, manual reset high limit setting of ≤ 200°F. ASME H stamp MAWT is 210°F for the vessel. (For max setpoint, see Setpoint range.) ETL Certified to ANSI Z21.13 / CSA 4.9 ETL Certified to UL 795 / CSA 3.1		
 		
DIMENSIONS / CONNECTIONS		
Height:	54 7/8"	(Note 1)
Width:	46	(Note 2)
Length:	75 5/8"	(Note 3)
Supply Connection:	4" Grooved	
Return Connection:	4" Grooved	
Vent / Air Intake Connections:	10"	
Condensate / Boiler Drain Connection:	1"	
Gas Connection:	1 1/2" NPT	

FLOWS AND PRESSURE DROPS		
Delta T	Flow (GPM)	Δ P (Ft. Hd)
20°F Δ T	194	19.7
30°F Δ T	129	10.5
40°F Δ T	97	6.7

- NOTES:** 1. Height dimension is from floor to top of jacket.
 2. Length is from jacket front to jacket rear.
 3. Dimensions shown are for reference only

AMP CONDENSING BOILERS - SUBMITTAL DATA SHEET

STANDARD EQUIPMENT

PRESSURE VESSEL DESIGN

Stainless Steel Heat Exchanger
 ASME Section IV Certified, "H" Stamp
 MAWP 160 PSIG & Max Temp 210°F
 Setpoint range is 60-185°F
 Adjustable, manual reset high limit setting of ≤ 200°F.
 ASME H stamp MAWT is 210°F for the vessel. (For max setpoint, see Setpoint range.)
 Ten Year Limited Pressure Vessel Warranty

COMBUSTION DESIGN

Stainless Steel Pre-Mix Burner
 Low NOx Emissions (< 10 ppm)
 Full Modulation, 5:1 Turndown
 Natural Gas, Propane or Dual Fuel (Gas/Gas)
 4" wc (8" wc Propane) to 14" wc inlet gas pressure
 Direct Spark Ignition System with UV Scanner
 High/Low gas pressure switches, manual reset
 Zero governor gas valve
 Variable Speed Combustion Blower
 Air Proving Switch
 Blocked Vent Switch
 Manual fuel changeover switch (Dual Fuel Only)

VENTING

Category II or IV Venting
 Individual or Common (Engineered) Vent System
 Vertical or Horizontal
 CPVC, PP or SS Venting *Materials Acceptable
 Combustion Air Intake - Sealed or Room

* Flue system material shall be capable of continuous operation at 210°F or higher and shall be certified to UL 1738 – venting system for gas-burning appliances cat II, III and IV.

BOILER EQUIPMENT

Concert™ Control (24 Vac)
 High Limit Temp Control, Manual Reset
 Low water cutoff, manual reset
 Water Flow Switch
 Supply & Return Water Temperature Sensors
 Flue Gas Temperature Sensor
 Condensate trap
 Blocked Condensate Switch
 Pressure & Temperature Gauge
 ASME Relief Valve
 (Available 30, 50, 60, 75, 100, 125 or 150 psig)

ELECTRICAL DESIGN

Models 1000-2500:

- 120-208-230VAC/60HZ/1PH - High Voltage
 (1500 to 2500 - Optional 208-230-460VAC/60HZ/3PH)

Models 3000:

- 208-230-240VAC/60HZ/1PH - High Voltage
 - 208-230-240-460VAC/60HZ/3PH - High Voltage

Models 3500-4000:

- 208-230-240-460VAC/60HZ/3PH - High Voltage
 - PCB (Printed Circuit Board) Fused Connections

24VAC/5VDC - Low Voltage PCB

- EMS Communications
 (Dual RJ45 Jacks for Peer-To-Peer or ModBus)
 - Boiler Options (Sensors)
 - Pumps (Boiler, DHW, System) & Auxiliary Devices

OPTIONAL EQUIPMENT

Hydronic Kit (Boiler Circulation Pump, Pump Flange Kit and Condensate Neutralizer)

External High Limit Temperature Control, Manual Reset

Condensate Neutralizer

Supply Header Temperature Sensor:

☐ Direct Immersion

☐ Well Immersion (with Well)

Outdoor Air Temperature Sensor:

☐ Wired

☐ Wireless

EMS Signal Converter Kit (Converts Energy or Building Management System 0-10v signal to 4-20mA)

Motorized Isolation Valves

Alarm Buzzer with Silencing Switch

Gas Valve Proving Switch

Vent Adapter - CPVC

Universal Communications Gateway (BACnet, Metasys, Modbus or Lonworks)

Stackable Rack

Conductor Sequencing Panel

The Conductor manages multiple condensing & non-condensing, small & large heat output, new and/or existing boilers (full modulation or on-off), and steam or hot water applications. It helps improve system efficiency by selecting and modulating the right boiler to match operating conditions. The Conductor offers a single point boiler plant Energy Management System (EMS) interface including Modbus TCP/IP, Modbus RTU RS485, BACnet/IP and BACnet MSTP standard. If Lonworks needed, add for the separate Lonworks gateway.

Extended Warranty

☐ 3-Year Parts

☐ 5-Year Parts


☐ 10-Year Parts

☐ 5-Year Parts/Labor

☐ 10-Year Parts/Labor

AMP CONDENSING BOILERS - SUBMITTAL DATA SHEET

CONCERT CONTROL FEATURES

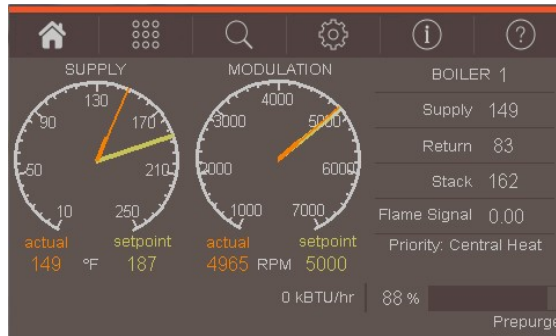

Dashboard - Color Touchscreen Display, 4"

Intuitive Icon Navigation

"Quick" Setup Menus

*Real Time BTU/H Display

Two (2) Temperature Demand Inputs

Outdoor Air Reset Curve for Each Input

Time of Day Setback Capability

(Envirocom Thermostat must be installed)

Three (3) Pump Control

Boiler Pump With On/Off or Variable Speed Control

Domestic Hot Water (DHW) Pump

System Pump

Alternative Control to Combustion

Air Damper or Standby Loss Damper

Pump Overrun for Heat Dissipation

Pump Exercise

Pump Rotor Seizing Protection

Peer-to-Peer Boiler Communications

Multiple Size Boiler Sequencing Up to 8 Units

*Two (2) Boiler Start/Stop Trigger

Lead Boiler Automatic Rotation

Energy Management System (EMS) Interface

*Firing Rate and Water Temperature Based

Algorithms for Multiple Boilers; loss of EMS

signal defaults to local boiler settings

420mAdc Input/Output (010Vdc Optional Converter)

ModBus Input/Output (BACnet or LonWorks

Optional Gateway)

Simultaneous Interface with PeerToPeer

USB Data Port Transfer

Upload Settings Between Boilers

Download Parameters for Troubleshooting

Import Data into .CRV Formatted Files for Performance

Analysis

* Unique to Concert



Energy Efficiency Enhancer

AntiCycling Technology

Multiplier boiler base load common rate

Outdoor Air Temperature Reset Curve

Warm Weather Shutdown

Boost Temperature & Time

Ramp Delay

OverTemperature Safeguarding

Self-Guiding Diagnostics

Identifies Fault

Describes Possible Problems

Provides Corrective Actions

Time/Date Stamp on Alarms and Lockouts

Unmatched Archives

Historical Trends Collects Up to 4 months Data

Event History Up to 3000 Alarms, Lockouts and Cycle & Run Times

Alarm Limit String Faults, Holds, Lockouts and Others

Cycle & Run Time Boilers & Pumps

Resettable (Lockouts/Alarms/Cycles & Run Time)

Domestic Hot Water Priority

DHW Tank Piped With Priority in the Boiler Loop

DHW Tank Piped as a Zone in the System With

the Pumps Controlled by the Concert Control

DHW Modulation Limiting

Status Screens

Sensor Monitoring and Control

Other Features

Factory Default Settings

Three Level Password Security

Frost Protection

Contractor Contacts (Up to 3)

Low Water Flow Safety Control & Indication

Proportion Integral Derivative (PID) Parameters for

Central Heat, DWH, Sequencer and Fan

Built-in Brown-Out Protection