


Submittal Data Sheet

NOTES:

1. SEE O&M FOR REQUIRED INSTALLATION CLEARANCES.
2. DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.
3. DIMENSIONS ENCLOSED IN [] ARE IN MM.

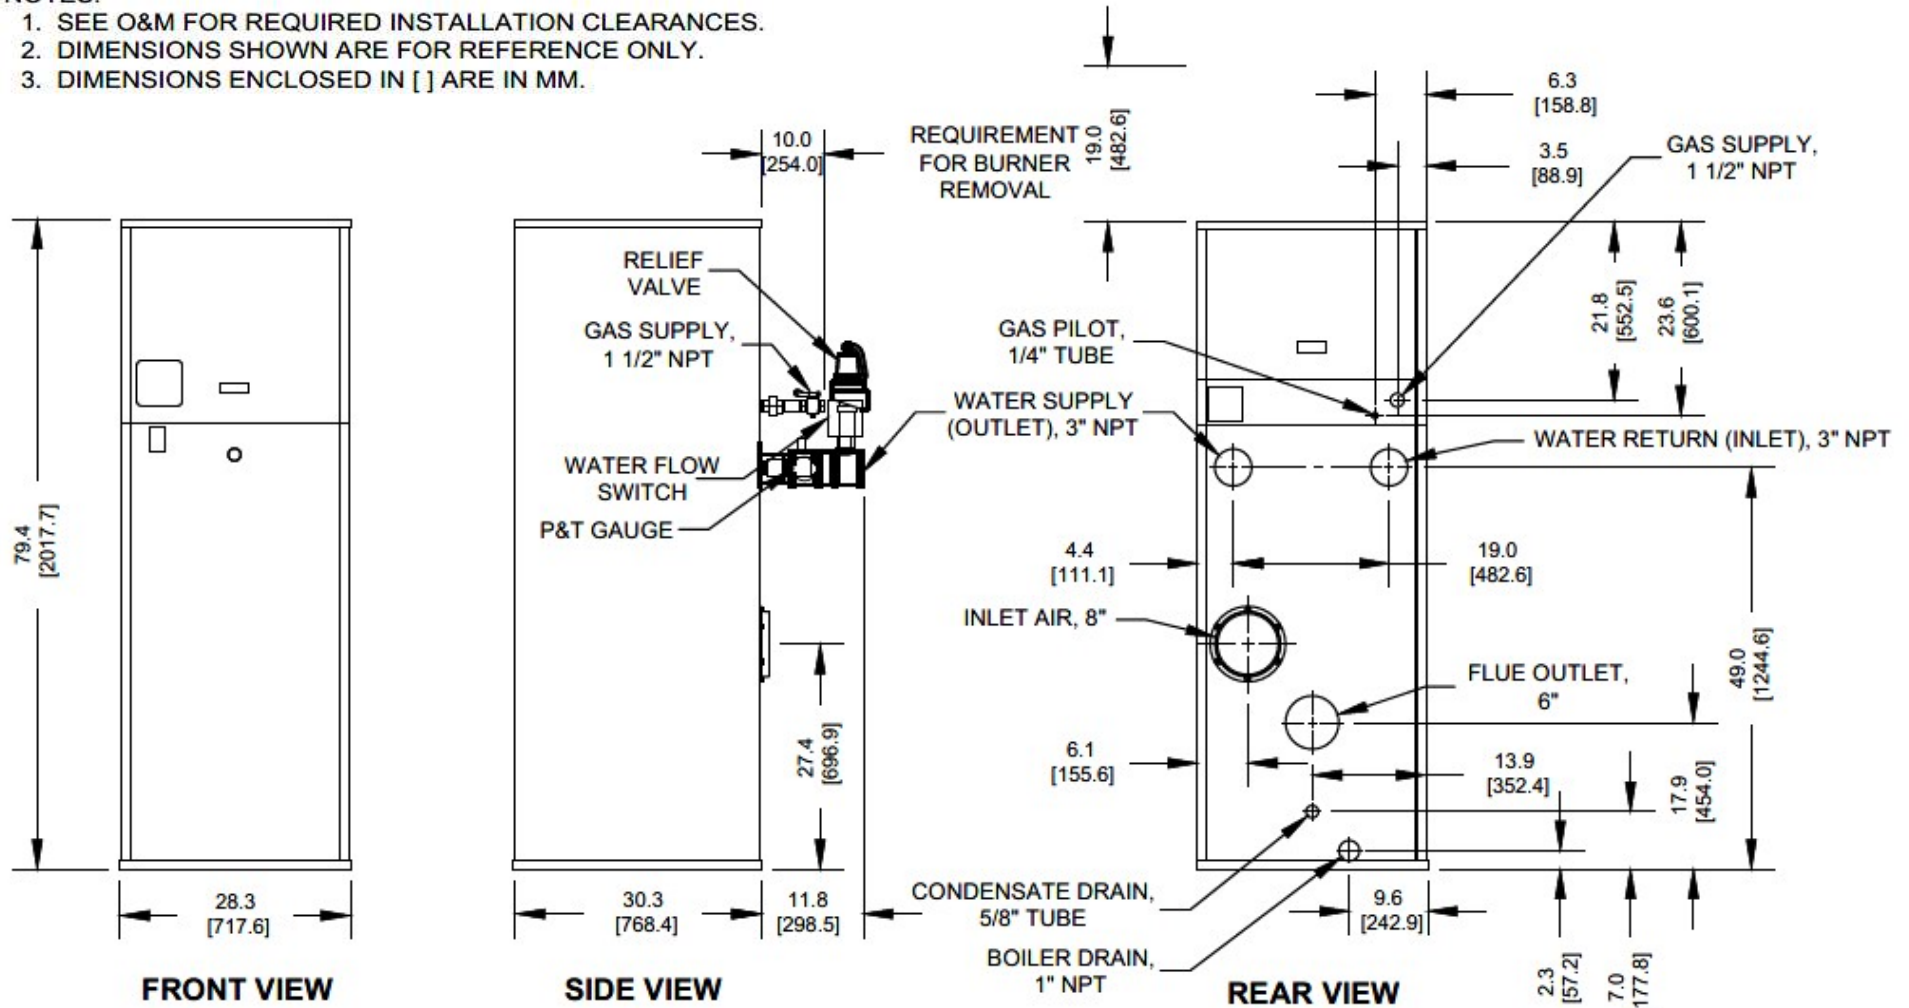

Submittal Data Sheet

RATINGS AND CAPACITIES

Input (MBH):	1,500,000	BTU/HR
Output (MBH):	1,275,000	BTU/HR
Boiler Horsepower:	38.1	BTU/HR
Thermal Efficiency:	85.0%	BHP
Heating Surface:	264	Sq.Ft.
Water Content:	17.4	Gallons
Fuel:	Natural Gas or LP Gas	
Firing Rate:	Reliable Modulation	
Burner Turndown:	3:1	
Low NOx Emissions:	<10 ppm	
Inlet Gas Pressure (NG):	See Chart at right	
Inlet Gas Pressure (LP):	See Chart at right	

* This data supercedes data found on Table 3 of I&O Manual, per PRODUCT UPDATE issued June 6, 2024.

Shipping Weight, Approximate: **1,327** lbs

ASME Section IV (Max 160 PSIG / 250°F)

Setpoint range is 145-230°F

Adjustable, manual reset high limit setting of ≤ 240°F.

ASME H stamp MAWT is 250°F for the vessel. (For max setpoint, see Setpoint range.)

UL Certified to ANSI Z21.13 / CSA 4.9

UL Certified to UL 795 / CSA 3.1



DIMENSIONS / CONNECTIONS

Height:	79 7/16"	(Note 1)
Width:	28 3/8"	(Note 2)
Length:	30 3/8"	(Note 3)
Supply Connection:	3"	
Return Connection:	3"	
Vent / Air Intake Connections:	6" Vent	8" Intake
Condensate / Appliance Drain Connection:	5/8" Condensate Tube	1" NPT Drain
Gas Connection:	1 1/2"	

NOTES:

1. Height dimension is from floor to top of jacket.

2. Length is from jacket front to jacket rear.

3. Dimensions shown are for reference only

FLows AND PRESSURE DROPS

Delta T	Flow (GPM)	ΔP (Ft. Hd)
20°F ΔT	120 (Max)	7.37
40°F ΔT	63 (Min)	1.85

Electrical Supply Options

☐	120v/60hz/1ph (Standard)	7.5 amps
☐	208v/60hz/1ph	6.6 amps
☐	230v/60hz/1ph	6.4 amps
☐	208v/60hz/3ph	6.0 amps
☐	230v/60hz/3ph	6.0 amps
☐	460v/60hz/3ph	3.0 amps

Blower Motor (hp)

1-1/2

Relief Valve Options

☐	30 psi	☐	50 psi	☐	60 psi
☐	75 psi	☐	100 psi	☐	125 psi
☐	150 psi				

Inlet Gas Pressure

SIZE	Nat. Gas Min. ("w.c.)	LP Min. ("w.c.)	Max
500	5.0" w.c.	8.0" w.c.	14.0" w.c.
750	7.0" w.c.*		
1000	7.0" w.c.*		
1500	7.0" w.c.*		
2000	9.0" w.c.*	9.0" w.c.	
2000s	7.0" w.c.	8.0	
2500	6.0" w.c.		
3000	6.0" w.c.		

* NOTE: Optional natural gas train with 4" w.c. minimum inlet gas pressure
ONLY AVAILABLE on sizes 750, 1000, 1500 & 2000.

Submittal Data Sheet

STANDARD EQUIPMENT		OPTIONAL EQUIPMENT												
PRESSURE VESSEL DESIGN Copper Fin-tube construction Carbon steel or cast iron header design Gasketless heat exchanger ASME Section IV certified "H" stamp MAWP 160 PSI & max design temp 250°F 5-year heat exchanger warranty 20-year thermal shock warranty	BOILER EQUIPMENT High limit w/ manual reset safety temperature control Water flow switch Low water cut-off with manual reset safety controller Outlet temperature sensor Combustion air switch Pressure and temperature gauge Safety relief valve (Optional pressure 30 - 150 PSI; See details above.) Single point electrical supply: (Available in: 1 and 3 phase options. See details above.)	OPTIONAL EQUIPMENT ☐ Low gas pressure venturi, 4" wc (AVAILABLE ONLY on Models 750-2000) [FACTORY INSTALLED OPTION ONLY] ☐ Honeywell 7800 Series display with ModBus Module ☐ Line Reactor Adds voltage / spike protection for the blower's VFD. (For areas with dirty voltage) ☐ Outdoor Air Sensor ☐ Condensate neutralizer: ☐ 850 MBH ☐ 1,200 MBH ☐ 2,000 MBH ☐ 5,000 MBH ☐ Pump Kit (Boiler Circulation Pump, Pump Flange Kit Sized based on a 20°F Delta T ☐ Annual Maintenance Kit ☐ System Temperature Sensor ☐ Universal com. gateway (BacNet MS/TP, BacNet/IP, LonWorks) ☐ Local / Remote Switch for Enable / Disable ☐ Alarm bell with silencing switch ☐ Relays: ☐ General Alarm ☐ Boiler Status Conductor Sequencing Panel: (Contact Regional Manager with Questions.) The Conductor Sequencing Panel manages multiple condensing & non-condensing, small & large heat output, new and/or existing boilers (full modulation), and steam or hot water applications. It helps improve system efficiency by selecting and modulating the right boiler to match operating conditions. The Conductor offers a single point boiler plant Energy Management System (EMS) interface including Modbus TCP/IP, Modbus RTU RS485, BACnet/IP and BACnet MSTP standard. If Lonworks needed, add for the separate Lonworks gateway.												
COMBUSTION DESIGN Maintenance-free ceramic burner Ultra-low NOx emissions (<10ppm) Whisper quiet operation (<50 dBA) Easy to service, 99% efficient industrial air filter Industrial cast aluminum blower assembly VFD Driven Blower Reliable electric spark-to-pilot ignition 10-year burner warranty Honeywell UV-Scanner	BURNER EQUIPMENT UL/FM/CSD-1 gas train Reliable Turndown Natural or LP gas Pilot gas valve / Pilot gas regulator Siemens SKP-75 gas valve Low and high gas pressure switches with manual reset													
VENTING Sealed or room air combustion Direct vent (sidewall or vertical) (Cat IV) Conventional venting (Cat II) <i>NOTE: This is NOT a Cat I Vent appliance.</i>	TSBC Control Features Advanced Boiler Modulation or Setpoint Intelligent Multiplier Boiler Staging (8 Boilers) Building Management (BMS) Interface Outdoor Air Temperature Reset Warm Weather Shutdown Domester Hot Weather Priority Auxiliary Device Control ☐ Boiler Pump ☐ System Pump Adjustable setpoint or burner modulation with 1-9vDC input from BMS													
		Extended Warranty Options Available:												
		<table style="margin: auto; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding: 5px;"><u>Parts Only</u></th> <th style="text-align: center; padding: 5px;"><u>3-Year</u></th> <th style="text-align: center; padding: 5px;"><u>5-Year</u></th> <th style="text-align: center; padding: 5px;"><u>10 Year</u></th> </tr> </thead> <tbody> <tr> <td style="text-align: left; padding: 5px;"><u>Parts and Labor</u></td> <td style="text-align: center; padding: 5px;">☐</td> <td style="text-align: center; padding: 5px;">☐</td> <td style="text-align: center; padding: 5px;">☐</td> </tr> <tr> <td style="text-align: left; padding: 5px;"></td> <td style="text-align: center; padding: 5px;">N/A</td> <td style="text-align: center; padding: 5px;">☐</td> <td style="text-align: center; padding: 5px;">☐</td> </tr> </tbody> </table>	<u>Parts Only</u>	<u>3-Year</u>	<u>5-Year</u>	<u>10 Year</u>	<u>Parts and Labor</u>	☐	☐	☐		N/A	☐	☐
<u>Parts Only</u>	<u>3-Year</u>	<u>5-Year</u>	<u>10 Year</u>											
<u>Parts and Labor</u>	☐	☐	☐											
	N/A	☐	☐											

Submittal Data Sheet

TSBC CONTROL FEATURES



Flexible, Field Selectable Control

- Remote Setpoint Control or Firing Rate Control
- Factory defaults simplify field programming
- Eleven settings to help control oversizing

Boiler Monitoring and Diagnostic Displays

- Boiler inlet and outlet sensors
- (OPTIONAL) System header sensor
- (OPTIONAL) Outdoor air sensor
- Modulation rate setpoint & modulating percent
- Boiler sequencing messages, alarms, hold & lockout messages
- Event history - Up to 10 alarm messages & data

Modulation Rate

- Modbus or 1-9vDC input boiler modulation control options
- Choice of six different control modes
- Adjustable PID for local or remote control

Advanced Availability

- If optional header sensor fails, TSBC automatically reverts back to the outlet sensor to allow continued operation.

Outdoor Air Reset

- Fine tune the water temp based on outdoor air temp for maximized comfort and fuel savings.
Requires optional outdoor air temp sensor.
- Frost protection enabled with optional outdoor air sensor

Pump Control

- Domestic Hot Water (DHW) Pump
- System Pump
- Pump Overrun for Heat Dissipation
- Boiler Pump

Peer-to-Peer Network

- Lead-lag sequencing for up to eight (8) boilers.
- Selectable Lead boiler rotation, 8-720 hours
- RJ11 plug in connections between units (Requires splitter)
- Rotation off feature for complex installations

Warm Weather Shutdown (WWSD)

- Boilers used primarily for building heat will automatically shut down when outdoor temp reaches programmable WWSD setpoint.
- Saves energy by preventing boiler, pump and / or system pump from starting
- Requires the optional outdoor air sensor

Other Features

- Domestic Hot Water Priority (DHWP)
- Rotation enable and disable
- Setpoint adjustable up to 230F for boilers and 200F for water heaters
- Defineable min. setpoint to reduce chance of condensing
- 3 pump control capable, Boiler, DHW, System