





COMMERCIAL HOT WATER HEAT EXCHANGER RATINGS AND DIMENSIONS

COMPONENT IDENTIFICATION

1. Hot Water Outlet
2. Hydronic System Supply
3. Boiler Water Supply
4. 1/4" Nipple for Safety Valve
5. 1/2" Coupling for T/P Guage
6. Hydronic System Return
7. Cold Water Inlet
8. Boiler Water Return
9. Well for Aquastat
10. Diptube (Included)
11. Adjustable Feet

DIMENSIONS (Inches)

Model	H26	H48	H72	H119
Height	42.00	45.00	49.00	60.00
Width/Depth	19.50	24.50	26.50	30.50
Boiler Conn.	1.00	1.25	1.50	2.00
Hot/Cold Water Conn.	1.25	1.50	1.50	2.00
Hydronic System Conn.	1.50	1.50	2.00	2.00
"A" Dimension	5.00	5.50	7.00	8.00
"B" Dimension	4.00	7.50	9.00	10.00
"C" Dimension	3.25	5.75	6.00	7.00
"D" Dimension	3.25	5.75	6.00	7.00
"E" Dimension	2.50	4.00	5.00	7.00
"F" Dimension	3.00	5.50	6.50	9.00
"G" Dimension	2.00	2.25	2.50	2.50
"H" Dimension	9.00	12.00	12.50	13.70
"I" Dimension	2.50	4.00	5.00	7.00
"J" Dimension	3.00	5.00	6.50	9.00

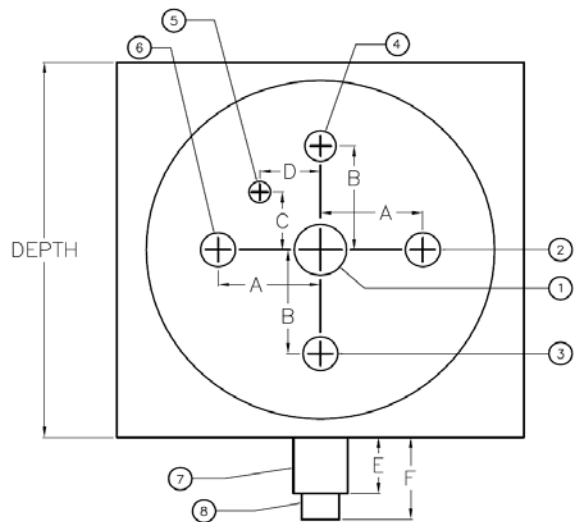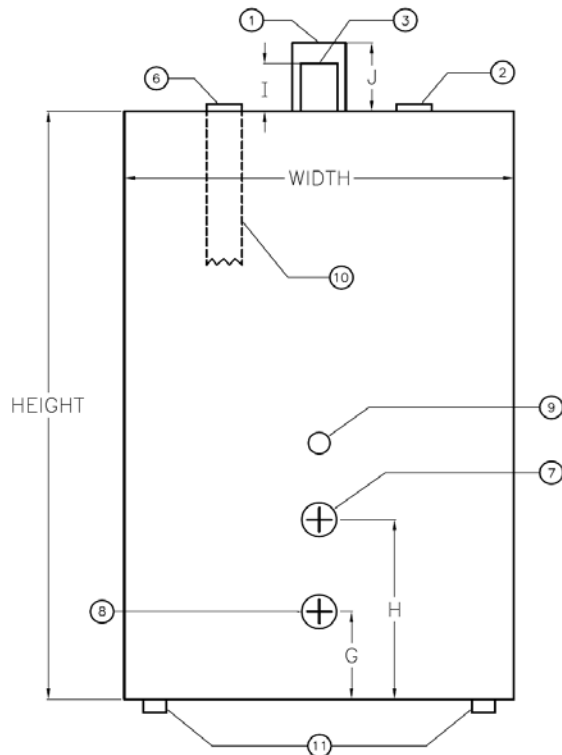

TECHNICAL DATA

MODELS	TANK VOLUME (GAL.)	HEAT TRANSFER AREA (SQ./FT.)	CONNECTIONS			MAWP		APPROX SHIPPING WEIGHT (LBS)
			DOMESTIC WATER (IN)	BOILER WATER (IN)	HYDRONIC (IN)	DOMESTIC (PSI)	BOILER (PSI)	
H26	26	21.0	1.25	1.00	1.25	150	30	210
H48	48	26.2	1.50	1.25	1.25	150	60	375
H72	72	26.2	1.50	1.50	2.00	150	115	575
H119	119	47.1	2.00	2.00	2.00	150	115	800